

Series

M60/M125/M250/M500



CE IP54

**Total Reliability - Advanced Diagnostics, Unrivaled Output Pressure, Wide Temp. Capability.**



Pulsarlube **M**



### Features & Advantages

#### Cost Savings

Substantial savings from the use of replaceable grease pouches and battery packs (Service Pack)

#### Remote Installation

High output pressure (30bar) enables remote installation up to 10m (33ft)

#### Multi-Point Installation

Up to 8 lube points using Ø6 tube, Max. 6m (20ft) per point

#### Simple Operation

Easy to program with built-in LCD and simple button controls

#### Convenient Maintenance

Transparent container for easy visual inspection of remaining lubricant

#### Other Features

- ▶ Various dispensing settings & grease pouch volumes to suit a wide range of industrial applications
- ▶ Auto Lock Out mode to prevent unintentional mode changes
- ▶ Easy to install in hazardous & confined areas




### Typical Applications



- Automotives, irons/steel mills, and nuclear power plants
- Motors and pumps in city water & wastewater treatment facilities
- Cleanroom & LM Guide where precise, multi-point lubrication is needed
- Any places with extreme (low or high) temperature
- HVAC equipment & cooling towers where long lube lines may be necessary



### Details

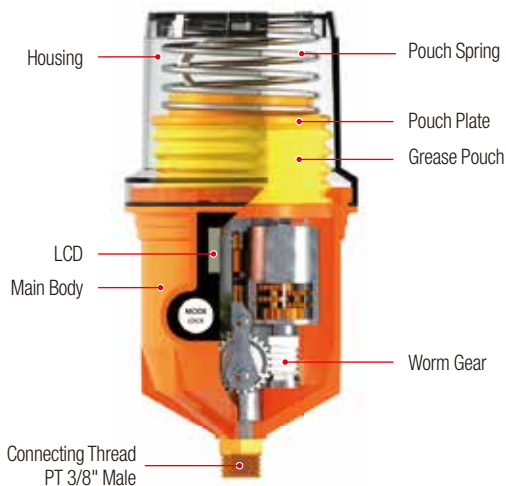

### Specifications

#### Grease Pouch Capacity

60ml / 500ml (pre-set)  
125ml / 250ml (capacity setting available)

#### Power Supply

DC 4.5V Battery Pack (replaceable)  
Standard : Alkaline Battery  
Optional : Lithium Battery

#### Operating Pressure

30 ~ 60bar (435 ~ 870psi)

#### Operating Temperature

Standard Alkaline Battery :  
-15°C ~ 60°C (5°F ~ 140°F)  
Optional Lithium Battery :  
-40°C ~ 60°C (-40°F ~ 140°F)

#### Dispensing Periods

60ml : 1 ~ 12 month  
125ml / 250ml : 1, 2, 3, 6, 12 month & H (15 days)  
500ml : 1, 2, 4, 6, 12, 18, 24 month & H (15 days)

#### Remote Installation

Max. 10m (33ft) with Ø6 tube

#### Multi-Point Installation

Max. 6m (20ft) with Ø6 tube  
(Up to 8 lube points)

#### Dispensing Volume Size

0.34ml/stroke (@20°C/68°F)

#### Product Certifications & IP Code

CE / IP54